


Technische specificaties						
Type		Airbooster 2kW	Airbooster 3kW	Airbooster 5kW	Airbooster 9kW	Airbooster 15kW
Voltage	[V]	230V-1N	230V-1N	400V-3N	400V-3N	400V-3N
Nominaal vermogen "stand 1"	[kW]	1	1,5	3,3	6	7,5
nominale stroom "stand 1"	[A]	4,3	6,5	3x 4,7	3x 8,7	3x 10,9
Nominaal vermogen "stand 2"	[kW]	2kW	3,0kW	5,0kW	9,0kW	15,0kW
nominale stroom "stand 2"	[A]	8,7A	13,0A	3x 7,2A	3x 13,0A	3x 21,7A
Benodigde afzekering	[A]	16A	16A	3x 16A	3x 16A	3x 25A
minimale bedrading		3x 2,5mm ²		5x 2,5mm ²		
Geluidsproductie (op 5m afstand):	dB(A)	43	43	47	53	54
Beschermingsklasse heater	[IP]				IP 44	
Beschermingsklasse thermostaat	[IP]				IP 21	
Breedte	[mm]	232	232	232	307	307
Hoogte	[mm]	318	318	318	402	402
Diepte	[mm]	215	215	215	282	282
Voldoet aan de Ecodesign eisen 2009/125/EU en EU regulation 2015/1188						



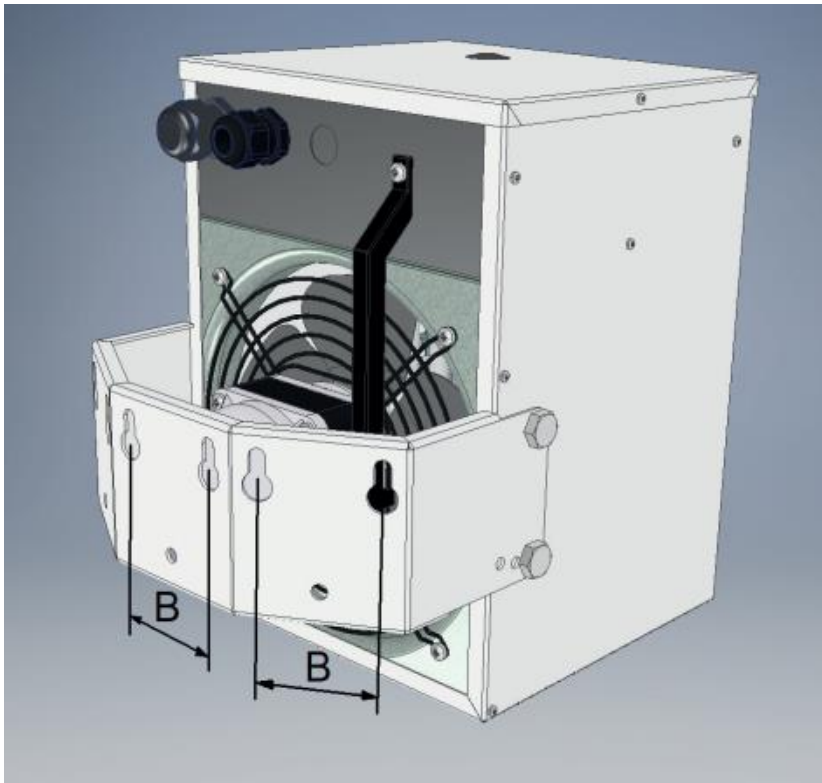

MASTERWATT B.V.

POSTBUS 375

2990 AJ BARENDRECHT

Tel. +31 (085) - 303 74 50 / www.masterwatt.nl / info@masterwatt.nl